



PACKAGE DIMENSION

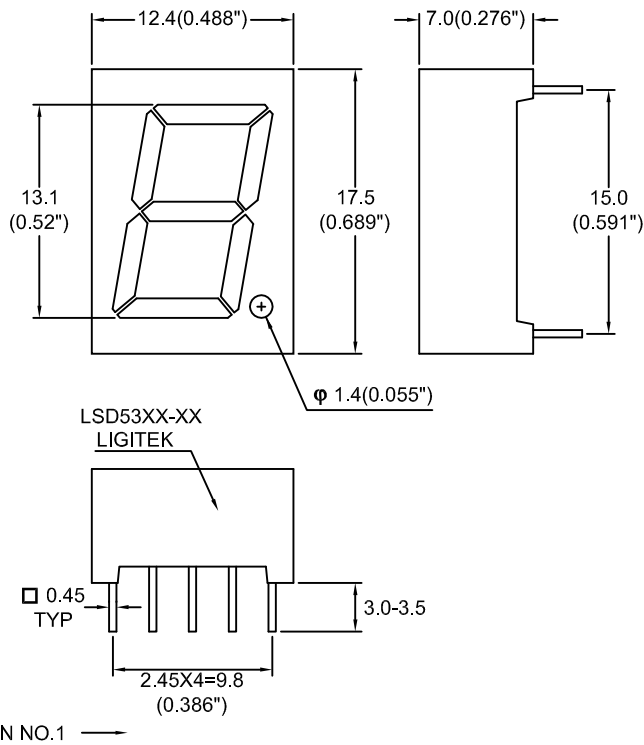

INTERNAL CIRCUIT DIAGRAM

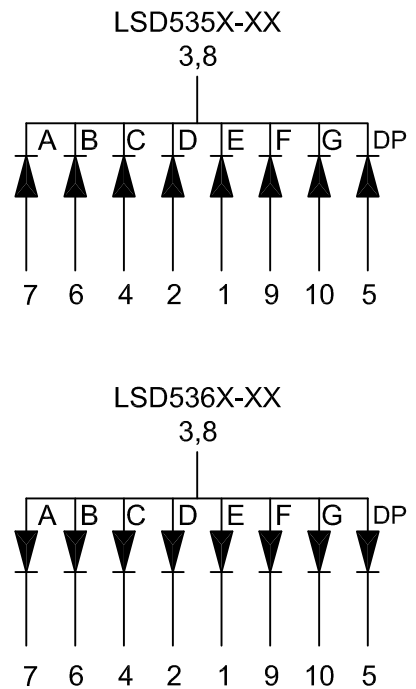

NOTE:1.All Dimension Are In Millimeters And (Inch)
Tolerance Is $\pm 0.25(0.01)$ " unless Otherwise Noted
2.Specifications are subject to change without notice

▪ **Connection To Electrical Schematic**

Electrical connection

PIN NO.	LSD535X-XX	PIN NO.	LSD536X-XX
1	Anode E	1	Cathode E
2	Anode D	2	Cathode D
3	Common Cathode	3	Common Anode
4	Anode C	4	Cathode C
5	Anode DP	5	Cathode DP
6	Anode B	6	Cathode B
7	Anode A	7	Cathode A
8	Common Cathode	8	Common Anode
9	Anode F	9	Cathode F
10	Anode G	10	Cathode G

• Part Selection And Application Information(Ratings At 25°C Ambient)

PART NO	CHIP		common cathode or anode	λ_p (nm)	$\Delta\lambda$ (nm)	Electrial					IV-M
	material	emitted				Vf(v)			Iv(mcd)		
						Min	Typ	Max	Min	Typ	
LSD5355-XX	GaAlAs	Red	Common Cathode	660	20	1.5	1.7	2.4	5.0	8.5	2:1
LSD5351-XX	GaP	Red		697	90	1.7	2.1	2.8	0.5	1.0	2:1
LSD5352-XX	GaP	Green		565	30	1.7	2.1	2.8	2.35	4.0	2:1
LSD5353-XX	GaAsP/GaP	Yellow		585	35	1.7	2.0	2.8	1.75	2.6	2:1
LSD5354-XX	GaAsP/GaP	Orange		635	45	1.7	2.0	2.8	3.05	4.5	2:1
LSD5365-XX	GaAlAs	Red	Common Anode	660	20	1.5	1.7	2.4	5.0	8.5	2:1
LSD5361-XX	GaP	Red		697	90	1.7	2.1	2.8	0.5	1.0	2:1
LSD5362-XX	GaP	Green		565	30	1.7	2.1	2.8	2.35	4.0	2:1
LSD5363-XX	GaAsP/GaP	Yellow		585	35	1.7	2.0	2.8	1.75	2.6	2:1
LSD5364-XX	GaAsP/GaP	Orange		635	45	1.7	2.0	2.8	3.05	4.5	2:1

• Absolut Maximum Rating (Ta=25°C)

Parameter	Red		Green		Yellow		Orange		Unit	Remark
	SR	H	G	Y	E					
Forward Current Per Chip	40	15	30	20	30			mA		
Peak Current Per Chip (Duty 1/10,0.1mS Pulse Width)	200	60	120	80	120			mA		
Power Dissipation Per Chip	110	45	100	85	100			mW		
Derating Linear From 25°C Per Chip	0.45	0.25	0.45	0.45	0.45			mA/°C		
Reverse Current Per Any Chip	10		10	10	10			μA		
Operating Temperature	-25°C TO +85°C									
Storage Temperature	-25°C TO +85°C									

Solder Temperature 1-16 Inch Below Seating Plane For 3 Seconds At 260 °C

• Test Condition For Each Parameter

Parameter	Symbol	Unit	Test Condition
Forward Voltage Per Chip	Vf	volt	If=20mA
Luminous Intensity Per Chip	Iv	mcd	If=10mA
Peak Emission Wavelength	λ_p	nm	If=20mA
Spectral Line Half-Width	$\Delta\lambda$	nm	If=20mA
Reverse Current Any Chip	Ir	μA	Vr=5V
Luminous Intensity Matching Ratio	IV-M		