

DUAL DIGIT SMD DISPLAY(0.39")

# LSDD305/6A-XX

## DATA SHEET

DOC.NO : QW0905- LSDD305/6A-XX

---

REV. : A


---

DATE : 18 – Jan. – 2017

---




## Package Dimensions

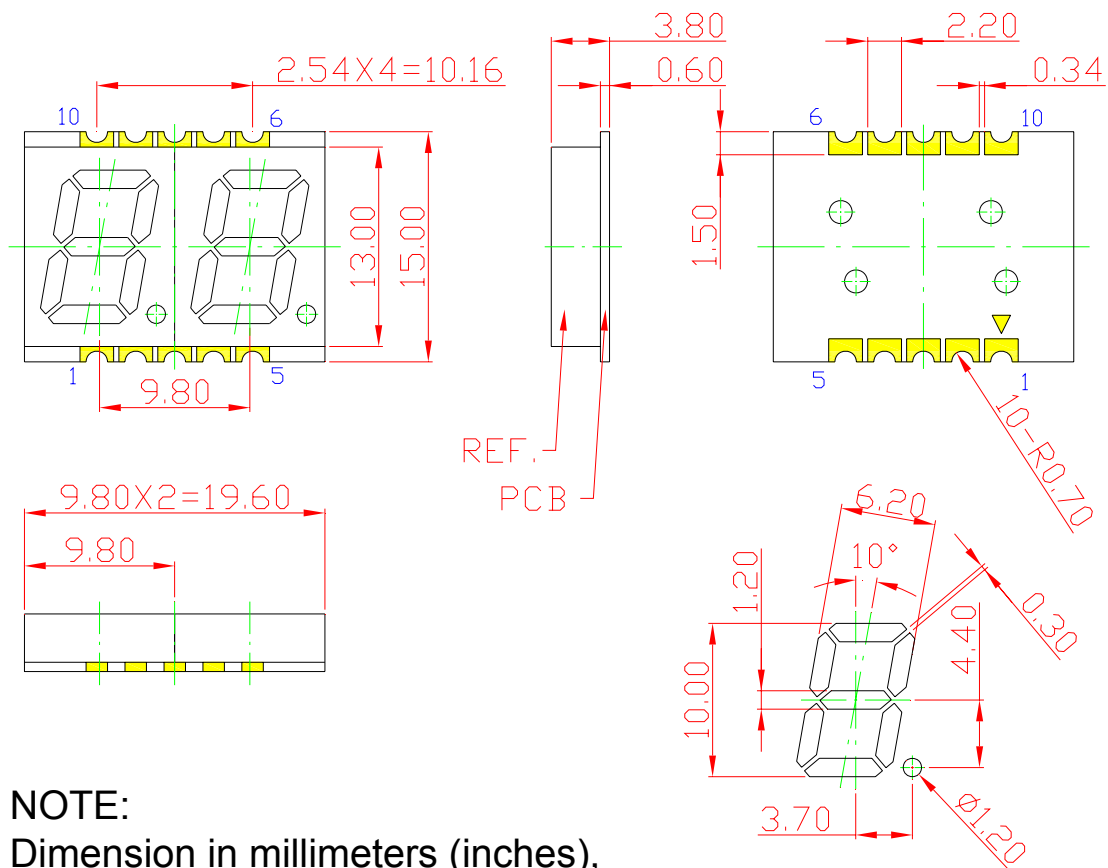


**NOTE:**  
Dimension in millimeters (inches),  
and tolerances are  $\pm 0.25\text{mm}$  (.01") specified.

## Recommended Soldering Pad

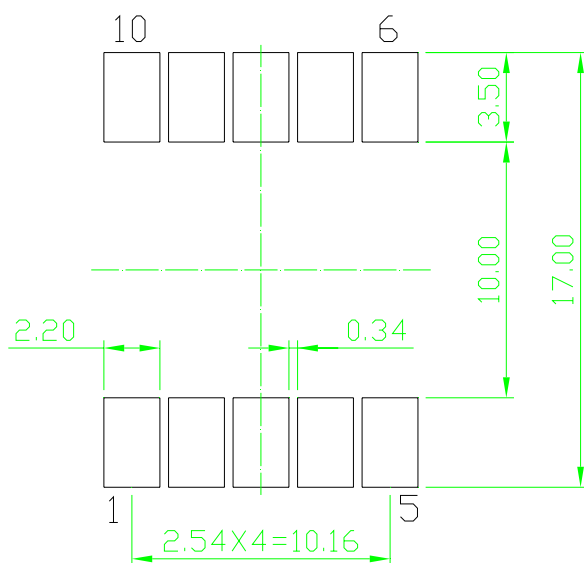

## Internal Circuit Diagram

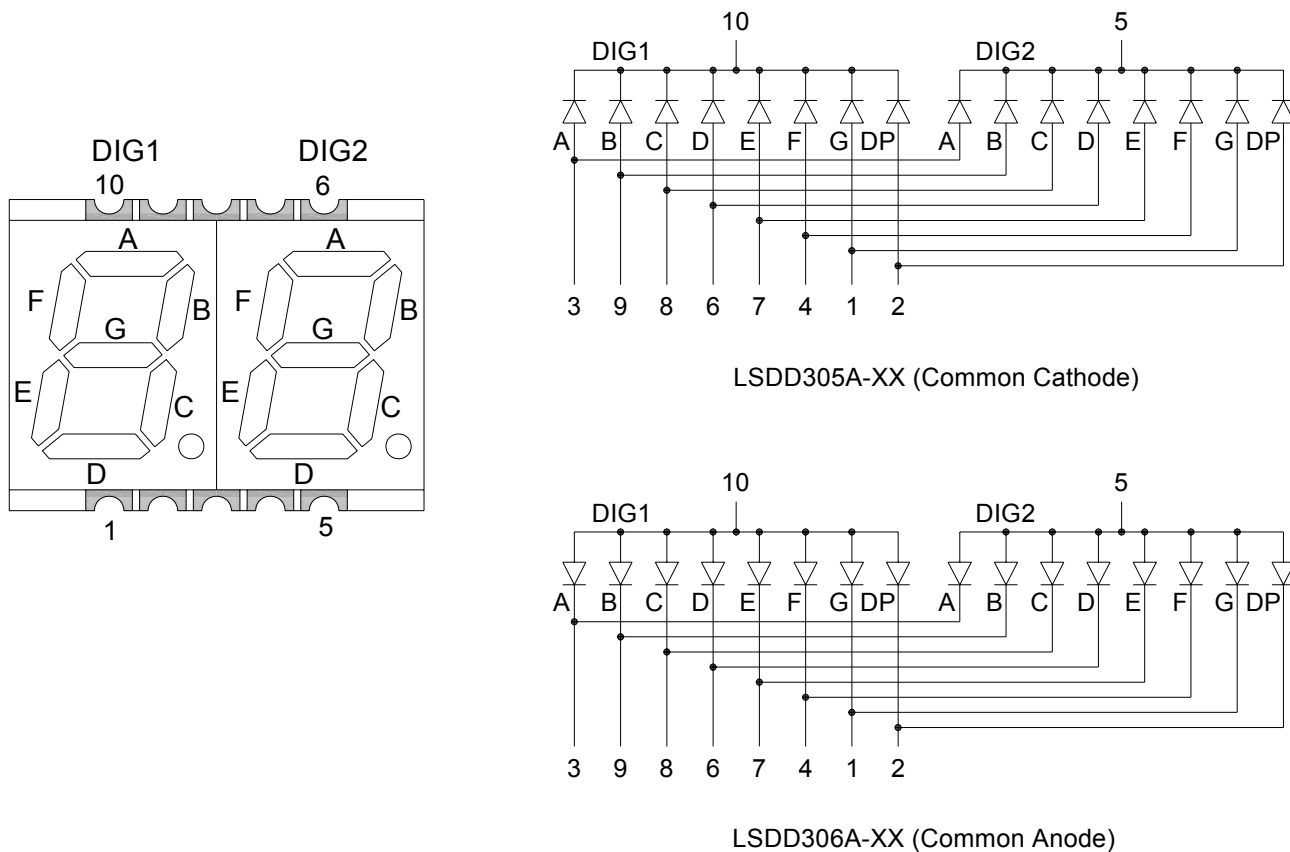

## Electrical Connection

PIN NO.	LSDD305A-XX	PIN NO.	LSDD306A-XX
1	Anode G	1	Cathode G
2	Anode DP	2	Cathode DP
3	Anode A	3	Cathode A
4	Anode F	4	Cathode F
5	Common Cathode DIG2	5	Common Anode DIG2
6	Anode D	6	Cathode D
7	Anode E	7	Cathode E
8	Anode C	8	Cathode C
9	Anode B	9	Cathode B
10	Common Cathode DIG1	10	Common Anode DIG1

## Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Ratings	UNIT
Power Dissipation	PD	70	mW
Peak pulse current Duty 1/10@1KHz	I <sub>FP</sub>	90	mA
Forward Current Per Chip	I <sub>F</sub>	25	mA
Debating liner from 25°C per segment	---	0.28	mA / °C
Storage Temperature	T <sub>stg</sub>	-40 ~ +105	°C
Operating Temperature	T <sub>opr</sub>	-40 ~ +105	°C

## Typical Electrical & Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	IV	6.0	----	25	mcd	IF=20mA
Dominant Wavelength	$\lambda D$	566	----	576	nm	IF=20mA
Spectral Line Half-Width	$\Delta \lambda$	----	20	----	nm	IF=20mA
Forward Voltage	VF	----	2.1	2.6	V	IF=20mA
Reverse Current	I <sub>r</sub>	----	----	10	$\mu A$	VR=5V

Note : 1.The forward voltage data did not including  $\pm 0.1V$  testing tolerance.

2.The luminous intensity data did not including  $\pm 15\%$  testing tolerance.

## Luminous Intensity Classification

BIN CODE	Iv(mcd) at 20mA	
	Min	Max
J	6.0	12.0
K	12.1	18.0
L	18.1	25.0

## Dominant Wavelength Classification

BIN CODE	$\lambda D$ (nm) at 20mA	
	Min	Max
1	566	569
2	569.1	572
3	572.1	576

## Typical Electro-Optical Characteristics Curve

(25 °C Free Air Temperature Unless Otherwise Specified)

A Super Bright Green (AlGaInP/GaAs) CURVE

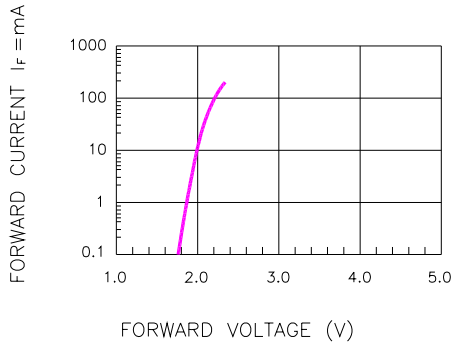


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

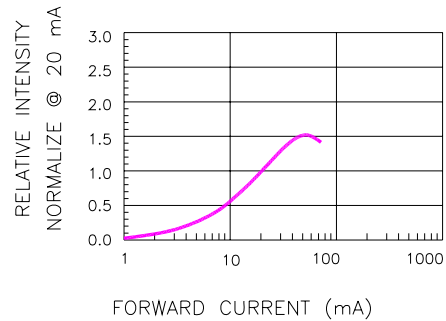


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

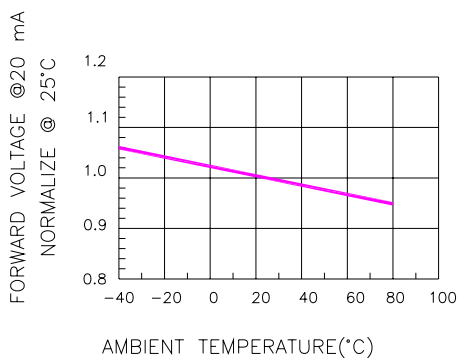


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

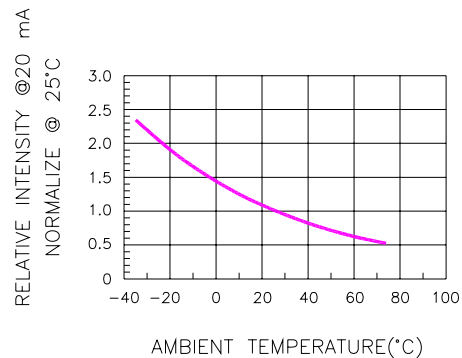


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

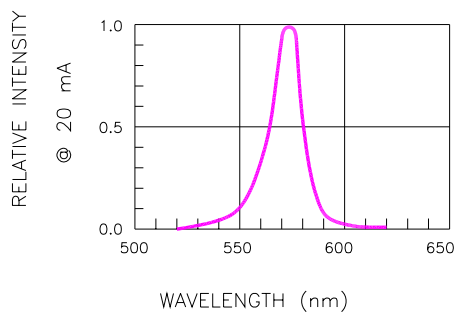


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


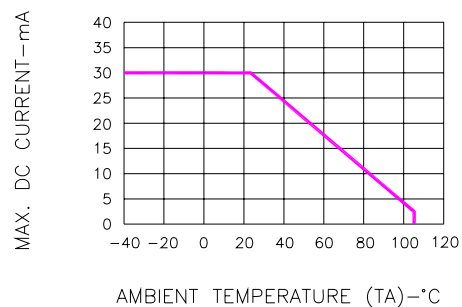


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

## SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

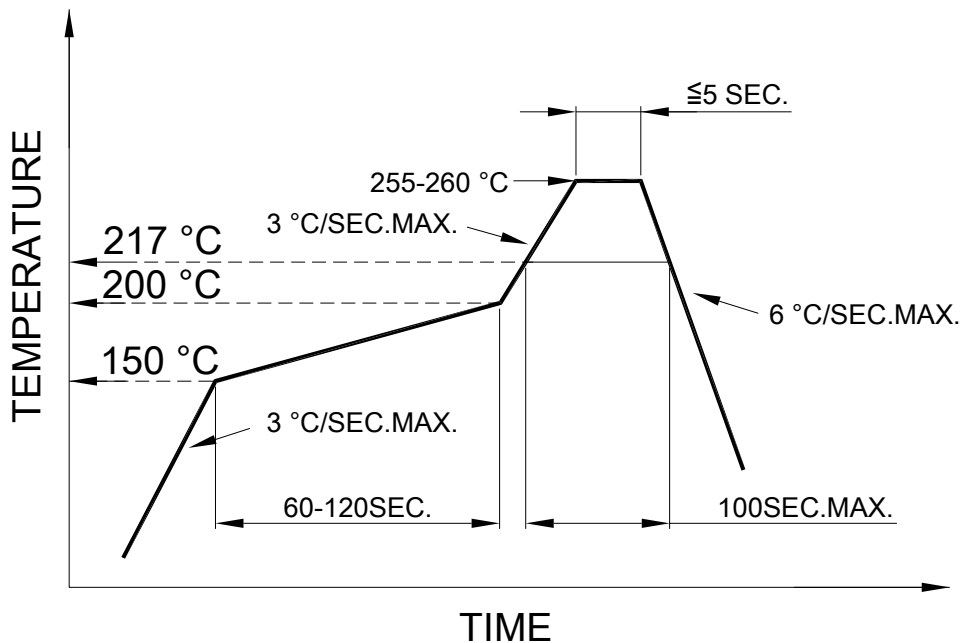

- We recommend the reflow temperature 245°C (+/- 5°C).  
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

## SOLDERING IRON


Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C→1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

## REWORK


Customer must finish rework within 3 sec. under 350°C.

The head of soldering iron cannot touch copper foil.

## REEL DIMENSIONS

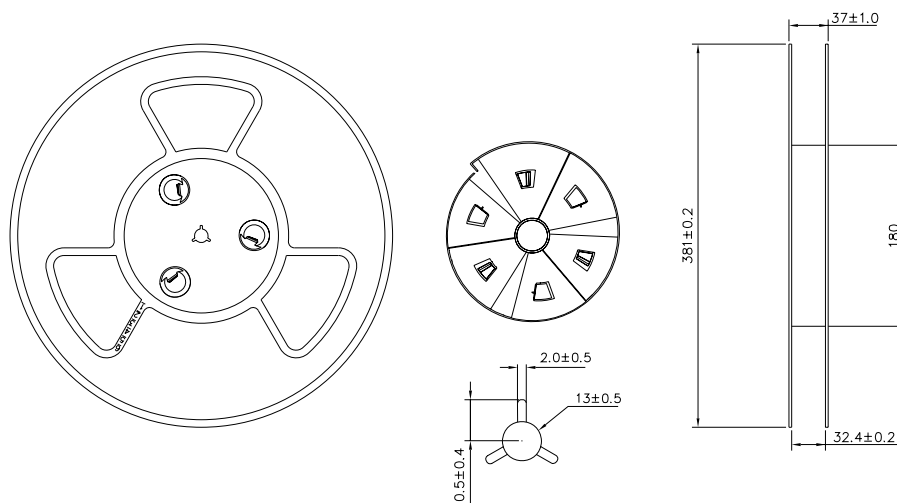

## PACKING & LABEL SPECIFICATIONS

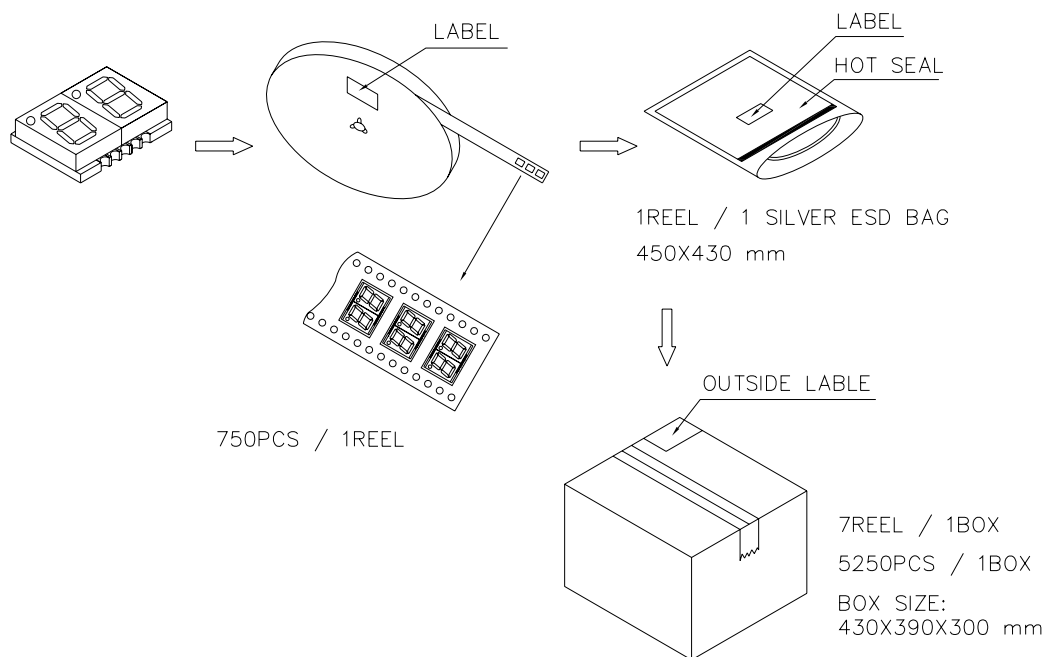

## ● TORAGED CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)