



LIGITEK ELECTRONICS CO.,LTD.
Property of Ligitek Only

SURFACE MOUNT LED TAPE AND REEL



Lead-Free Parts

L3WK5050/TR1-WW-A02

DATA SHEET

DOC. NO : QW0905-L3WK5050/TR1-WW-A02

REV. : A

DATE : 03 - Jan. - 2011



Features:

1. Top view white LED.
2. white SMT package.
3. Leadframe package with individual 6 pin.
4. Wide viewing angle.
5. Soldering methods: IR reflow soldering.
6. Feature of the device: more light due to higher optical efficiency; extremely wide viewing angle; ideal for backlighting and coupling in light guide.

Descriptions:

The L3WK5050 SMD has wide viewing angle, low power consumption and white LEDs are devices which are materialized by combining blue LEDs and special phosphors. This feature makes the LED ideal for light guide application.

Applications:

1. LCD back light.
2. Mobile phones.
3. Indicators.
4. Switch lights.
5. Lighting.

Device Selection Guide:

PART NO	MATERIAL	COLOR	
		Emitted	Lens
L3WK5050/TR1-WW-A02	InGaN/GaN	White	Yellow Diffused

Absolute Maximum Ratings at Ta=25

Parameter	Symbol	Ratings	UNIT
Forward Current	IF	90	mA
Peak Forward Current Duty 1/10@10KHz	IFP	300	mA
Power Dissipation	PD	360	mW
Reverse Current @5V	Ir	50	μ A
Electrostatic Discharge	ESD	500	V
Operating Temperature	Topr	- 20 ~ + 80	
Storage Temperature	Tstg	- 30 ~ + 100	

Typical Electrical & Optical Characteristics (Ta=25)

Items	Min.	Symbol	Min.	Typ.	Max.	UNIT	CONDITION
Luminous Intensity		Iv	5000	5500	----	mcd	IF=20mA X 3
Chromaticity Coordinates		X	0.41	----	0.461	----	IF=20mA X 3
		Y	0.374	----	0.433	----	IF=20mA X 3
Forward Voltage		V _F	2.8	3.2	3.6	V	IF=20mA X 3
Viewing Angle		2 1/2	----	120	----	deg	IF=20mA X 3

Note : 1.The forward voltage data did not including $\pm 0.1V$ testing tolerance.
 2.The luminous intensity data did not including $\pm 15\%$ testing tolerance.
 3.The color coordinates measurement allowance is ± 0.01 testing tolerance.

Luminous Intensity Classification

BIN CODE	Iv(mcd) at60mA	
	Min.	Max.
C00C50	5000	5500
C50D00	5500	6000
D00D50	6000	6500
D50E00	6500	7000


Forward Voltage Classification

BIN CODE	Vf(v) at60mA	
	Min.	Max.
1	2.8	2.9
2	2.9	3.0
3	3.0	3.1
4	3.1	3.2
5	3.2	3.3
6	3.3	3.4
7	3.4	3.5
8	3.5	3.6


Chromaticity Coordinates Specifications For Bin Grading

Color Coordiante at60mA									
CCT(K)	BIN CODE	1		2		3		4	
		X	Y	X	Y	X	Y	X	Y
2850~3050	NM	0.454	0.446	0.471	0.451	0.46	0.43	0.444	0.426
	NN	0.444	0.426	0.46	0.43	0.453	0.416	0.438	0.412
	NO	0.438	0.412	0.453	0.416	0.444	0.399	0.429	0.394
	NP	0.429	0.394	0.444	0.399	0.436	0.384	0.422	0.379
3050~3250	PM	0.438	0.44	0.454	0.446	0.444	0.426	0.43	0.421
	PN	0.43	0.421	0.444	0.426	0.438	0.412	0.424	0.407
	PO	0.424	0.407	0.438	0.412	0.429	0.394	0.416	0.389
	PP	0.416	0.389	0.429	0.394	0.422	0.379	0.41	0.374

CIE Chromaticity Diagram

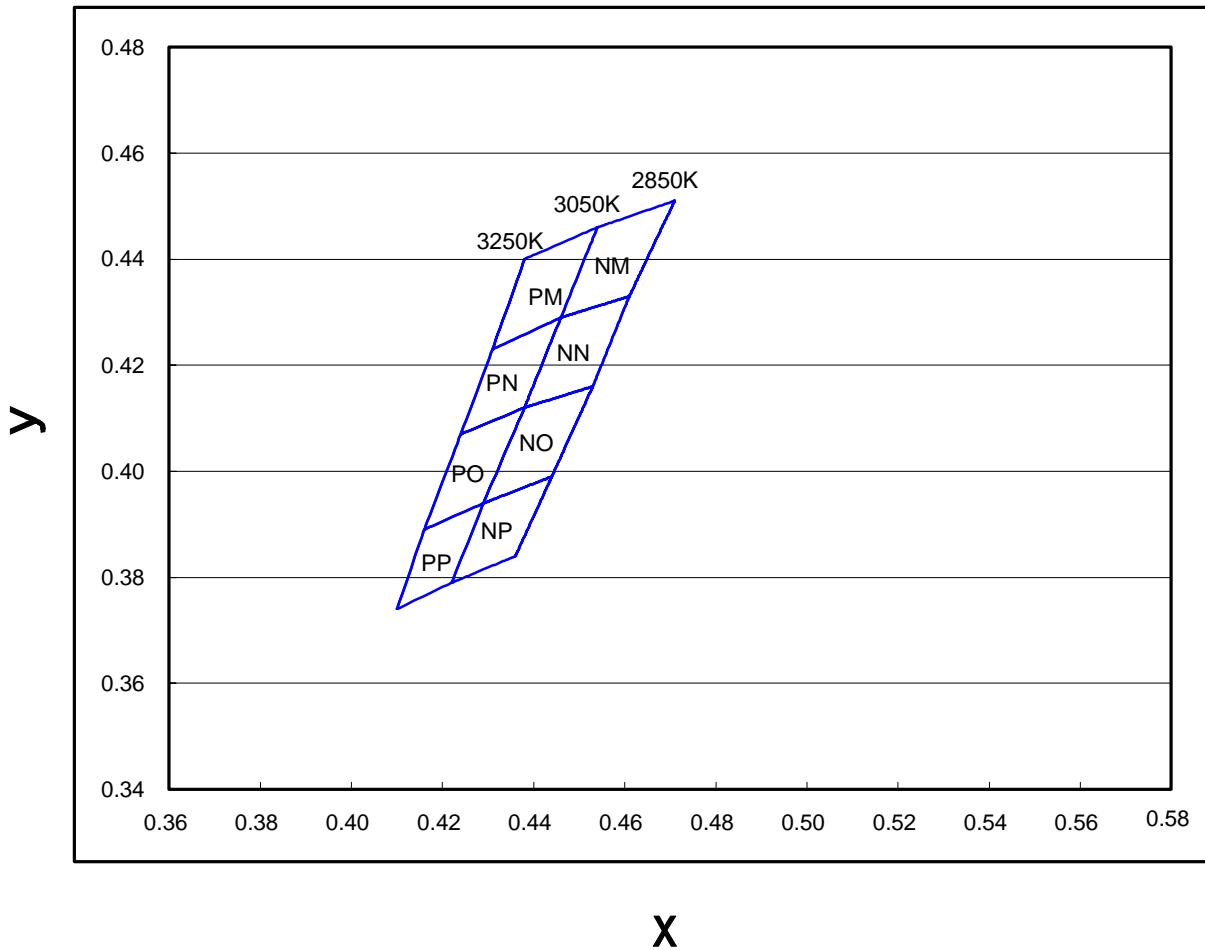


Carrier Type Dimensions

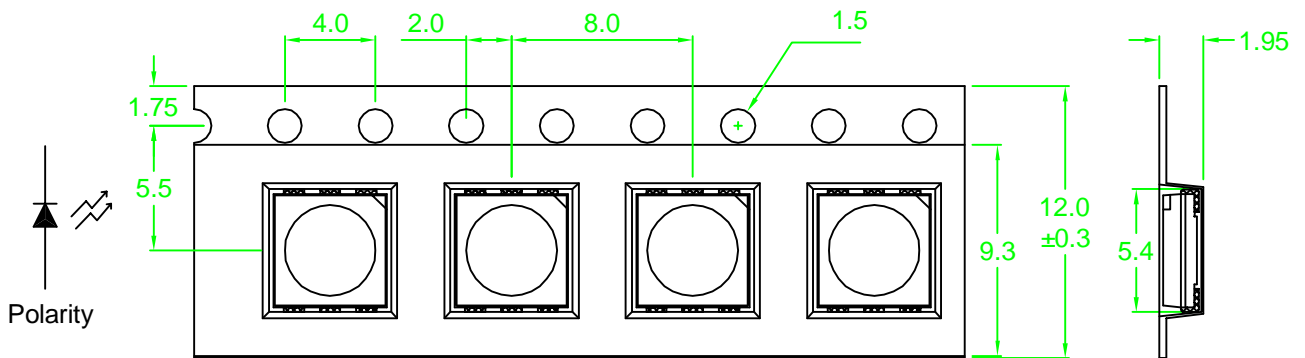


Note : The tolerances unless mentioned is $\pm 0.1\text{mm}$, Angle ± 0.5 . Unit=mm.

Packing Specifications

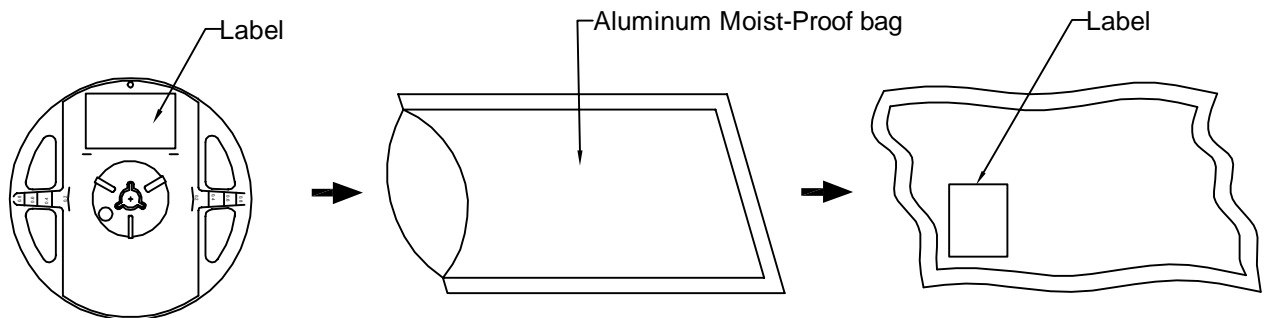

Part No.	Description	Quantity/Reel
L3WK5050/TR1-WW-A02	12.0mm tape,7"reel	1000 PCS

Label Explanation



 LIGITEK ELECTRONICS CO., LTD.	
PART :	L3WK5050/TR1/A-WW-A02
LOT :	GS1-0C0438
QTY(PCS):	1000
BIN/HUE :	C00C50/NN
	VF:3-3.1

BIN : Luminous Flux

HUE : Chromaticity Coordinates
(CIE_x , CIE_y)


3 - 3.1 : Forward Voltage

Reel Dimensions

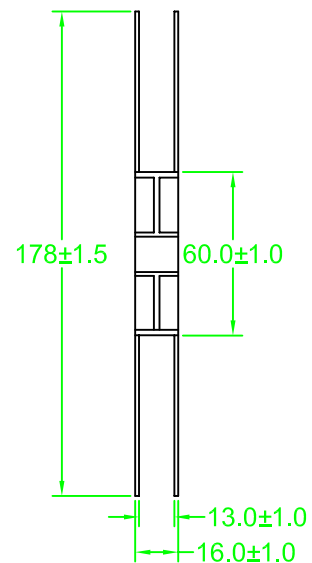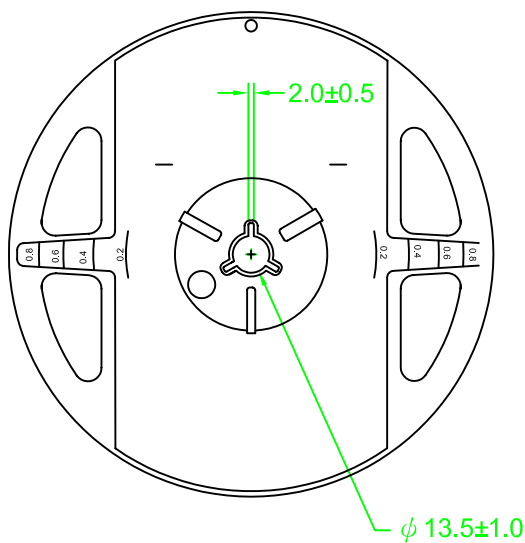


Box Explanation

1. 4 BAG / INNER BOX
2. INNER BOX SIZE : L X W X H 23cm X 8.5cm x 26cm

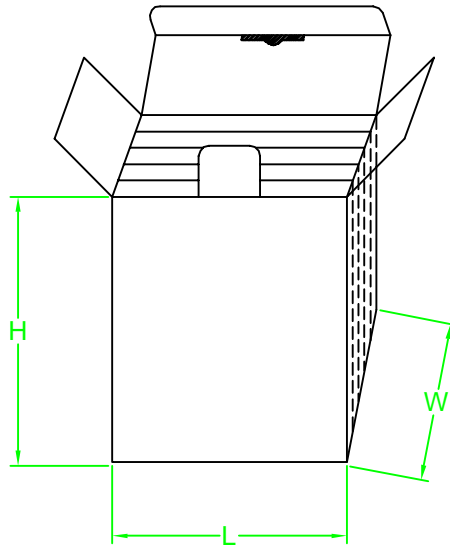

3. 10 INNER BOXES / CARTON
4. CARTON SIZE : L X W X H 58cm X 34cm x 35cm

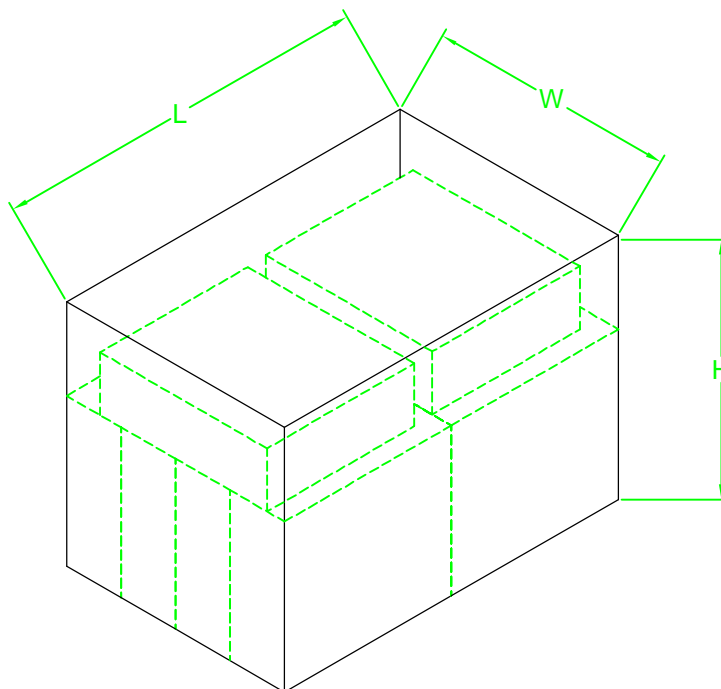


Recommended Soldering Conditions


1. Hand Solder

Basic spec is 320 3 sec one time only.

2. Wave Solder

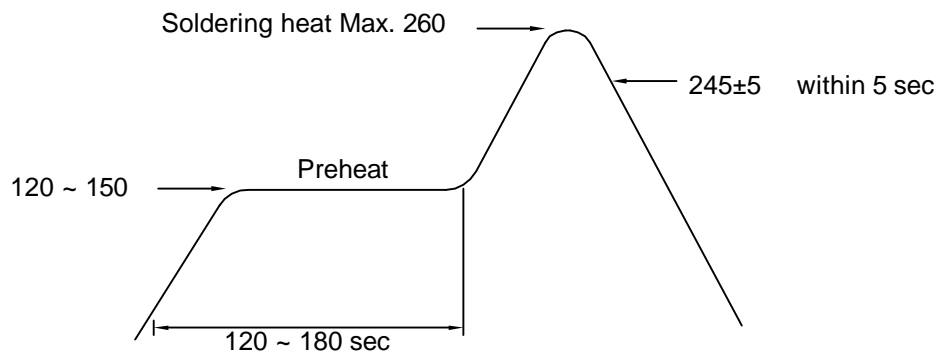

3. PB-Free Reflow Solder

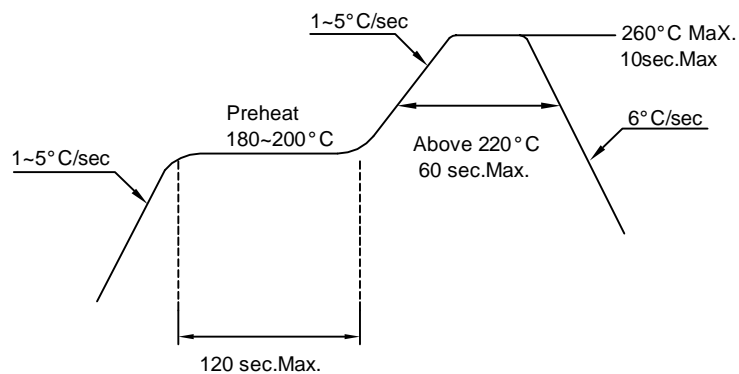

Note:

- 1.Reflow soldering should not be done more than two times.
- 2.When soldering,do not put stress on the LEDs during heating.
- 3.After soldering,do not warp the circuit board.

Precautions For Use:

Storage time:


- 1.The operation of Temperatures and RH are : 5 ~35 ,RH60%.
- 2.Once the package is opened, the products should be used within a week.
Otherwise, they should be kept in a damp proof box with descanting agent.
Considering the tape life, we suggest our customers to use our products within a year(from production date).
- 3.If opened more than one week in an atmosphere 5 ~ 35 ,RH60%,
they should be treated at 60 ±5 fo r 15hrs.

Drive Method:


LED is a current operated device, and therefore, requirer some kind of current limiting incorporated into the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the LED.

Consider worst case voltage variations than could occur across the current limiting resistor. The forwr d current should not be allowed to change by more than 40 % of its desired value.

Circuit model A

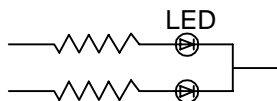

Circuit model B

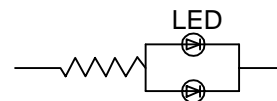

(A) Recommended circuit.

(B) The difference of brightness between LED could be found due to the VF-IF characteristics of LED.

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED.

ESD(Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic glove is recommended when handing these LED. All devices, equipment and machinery must be properly grounded.

Reliability Test:

(1)Test items and results

Classification	Test Item	Test Condition	Sample Size
Endurance Test	Operating Life Test	1.Ta=Under Room Temperature As Per Data Sheet Maximum Rating. 2.If=60mA 3.t=1000 hrs	22
	High Temperature Storage Test	1.Ta=105 ±5 2.t=500 hrs	22
	Low Temperature Storage Test	1.Ta=-40 ±5 2.t=1000 hrs	22
	High Temperature High Humidity Storage Test	1.IR-Reflow In-Board, 2 Times 2.Ta=85 ±5 3.RH=90 %~95% 4.t=500hrs±2hrs	22
Environmental Test	Thermal Shock Test	1.IR-Reflow In-Board,2 times 2.Ta=105 ±5 & -40 ±5 (30min) (30min) 3.total 100 cycles	22
	Reflow Soldering Test	1.T.Sol=260 ±5 2.Dwell Time= 10 Max .	22
	Temperature Cycling	1.105 ~ 25 ~ -40 30mins 15mins 30mins 2.100 Cyeles	22

(2)Criteria for judging the damage

Item	Symbol	Test Conditions	Criteria for Judgement	
			Min.	Max.
Forward Voltage	Vf	If=60mA	-	U.S.L x1.2
Reverse Current	Ir	Vr=5V	-	U.S.L x2.0
Luminous Intensity	Iv	If=60mA	L.S.L x 0.5	-

Note:

- 1.U.S.L.:Upper Standard Level.
- 2.L.S.L.:Lower Standard Level.